

One Axis, Thousands of Faces Freely Define the Aesthetics of Space

一轴千面
自由定义空间美学

CANOVO®

CANOVO pivot door hardware

Full load-bearing coverage (40KG-200KG), bringing a better opening experience;
Dual-axis drive (eccentric & central axis), unlocking the infinite possibilities of space design
All-round solution, adaptable to different door structures
The minimum body height is only 25mm, achieving a perfect balance between minimalist aesthetics and functionality
Let the design be boundless and let the space grow!

凯诺威CANOVO枢轴门五金

承重全覆盖 (40KG-200KG), 带来更佳开启体验;
双轴驱动 (偏轴&中轴), 解锁空间设计的无限可能
全能型解决方案, 适配不同门体结构
最小机体高度仅25mm, 达成极简美学与功能性的完美平衡
让设计无界, 让空间生长!

Model 型号	963	973	993	993R	893	895	893R	895R	883	885	883R	885R
Photos 图片												
360 degree rotation 360度旋转		x	x	x	√	x	√	√	x	x	√	√
90 degree positioning 90度双向开启		√	√	√	√	√	√	√	√	√	√	√
90 degree positioning function with hydraulic self-closing function 90度定位功能与液压自闭功能	√	√	√	√	√	√	√	√	√	√	√	√
Positioning stop gate angle 定位停门角度	90° , -90° 和 0°	90° , -90° 和 0°	90° , -90° 和 0°	0° , 90° , 180° 和 270°	90° , -90° 和 0°	90° , -90° 和 0°	0° , 90° , 180° 和 270°	0° , 90° , 180° 和 270°	90° , -90° 和 0°	90° , -90° 和 0°	90° , -90° 和 0°	90° , -90° 和 0°
Hydraulic self-closing function (closes door to 0 degrees) 液压自闭功能（关门到0度）	√	√	√	√	√	√	√	√	√	√	√	√
Closing speed adjustment 关门速度调整	√	x	√	x	√	√	√	√	x	x	x	x
Second stage: closing speed adjustment 第二段 关门速度调整	x	x	√	x	√	√	x	x	x	x	x	x
Latching speed adjustment 闭锁速度调整	x	x	√	x	√	√	x	x	x	x	x	x
Applicable door weight 适用门重	最大100KG	最大100KG	最大100KG	最大150KG	最大100KG	最大150KG	最大100KG	最大200KG	最大100KG	最大150KG	最大100KG	最大200KG
Applicable door width 适用门宽	偏轴1100mm 中轴1800mm	最大1200mm	最大950mm	最大1500mm	最大950mm	最大1250mm	最大1500mm	偏轴1800mm 中轴2500mm	最大950mm	最大1250mm	最大1500mm	偏轴1800mm 中轴2500mm
Minimum distance from axis to edge 轴心离边最小距离	90mm	95MM	58MM	85mm起 到门宽中心	58mm	61mm	85mm起 到门宽中心	88mm起 到门宽中心	58mm	61mm	85mm 到门宽中心	85mm 到门宽中心
Top gap 顶部缝隙	6mm	4mm	6mm	6mm	7mm	7mm	7mm	7mm	7mm	7mm	7mm	7mm
Bottom gap 底部缝隙	13mm	10mm	11mm	11mm	12.5mm	12.5mm	12.5mm	12.5mm	12.5mm	12.5mm	12.5mm	12.5mm

Remarks: The above data is for reference, for specific wire type, please contact CANOVO International Hardware sales technicians.
备注：以上数据供参考，具体选型，请联系凯诺威销售人员。

LET'S EXPLORE OUR PIVOT DOOR SYSTEM SOLUTIONS TOGETHER

It can rotate 360 degrees and features a hydraulic self-closing function. The door can be positioned and closed at 0 degrees, 90 degrees, 180 degrees, and 270 degrees, with two adjustable closing speed settings.

让我们一起探索
我们的枢轴门系统
解决方案

可以360度旋转，具有液压自闭功能，
0度、90度、180度、270度，均可定
位关门，速度两段可调

The D Series Body
D系列机体


Upper Door Pivot
门体上部转轴

Floor Decorative Cover
地面装饰盖

Adjustable Floor Fitting
地面可调配件

The R Series Body
R系列机体

Top Embedded Fitting
顶部预埋配件



Perfectly Invisible Pivot Door

完美隐形的枢轴门

The hidden, timeless beauty—this is the value we uphold as we dedicate ourselves to designing high-quality, exceptional pivot door system solutions, driven by a passion for detail.

We integrate the pivot door system seamlessly into the door, offering endless design possibilities and an exceptionally smooth door-opening experience. Let's explore our pivot door system solutions together.

隐藏的永恒之美，基于这一价值，我们致力于设计高质量的不寻常的枢轴门系统解决方案，并充满对细节的热情。

我们让枢轴门系统隐藏在门中，提供无尽的设计可能性和超顺的开门使用体验，让我们一起探索我们的枢轴门系统解决方案。

R Series Pivot Hardware

Central axis / Pivot installation options available

R系列枢轴五金

中轴 / 偏轴安装可选


Model 型号	893R
Material 材质	Stainless Steel / Anodized Aluminum 不锈钢 / 阳极氧化铝
Dimensions 尺寸	234x57x32mm
Positioning 定位	Can be positioned at -90°, 0°, 90°, 180°, and 270° -90°和0°, 90°, 180°, 270°均可定位
Load Capacity 承重	100KG
Door Width 门宽	1500mm
Function 功能	It can rotate 360 degrees, open in both directions, and can be positioned at 0, 90, 180, and 270 degrees. It can be hydraulically closed. The closing speed is adjustable. 可以360度旋转, 双向开启, 0度、90度、180度、270度均可定位, 液压自闭, 闭门速度可调。

Model 型号	895R
Material 材质	Stainless Steel / Anodized Aluminum 不锈钢 / 阳极氧化铝
Dimensions 尺寸	236x65x40mm
Positioning 定位	Can be positioned at -90°, 0°, 90°, 180°, and 270° -90°和0°, 90°, 180°, 270°均可定位
Load Capacity 承重	200KG
Door Width 门宽	Central axis 1800mm Pivot axis 2500mm 偏轴 1800mm 中轴 2500mm
Function 功能	It can rotate 360 degrees, open in both directions, and can be positioned at 0, 90, 180, and 270 degrees. It can be hydraulically closed. The closing speed is adjustable. 可以360度旋转, 双向开启, 0度、90度、180度、270度均可定位, 液压自闭, 闭门速度可调。





Optional Specifications

规格可选

893R

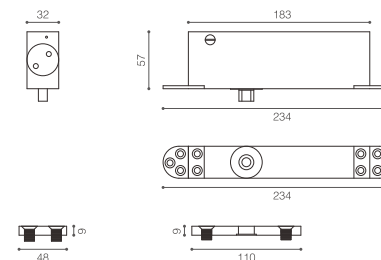

895R

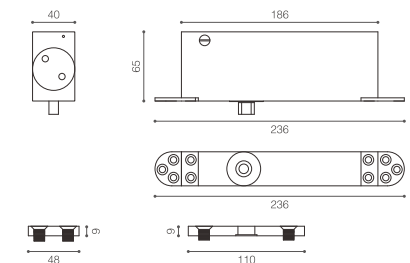Central Axis Installation
中轴安装Pivot Installation
偏轴安装



The Pivot Door System That Continues to Advance

持续前行的枢轴门系统

CANOVO's goal is to continually provide endless design possibilities for pivot door systems. At the same time, we aim to achieve unparalleled smooth operation for every type of pivot door, seamlessly connecting form and function.

CANOVO的目标是不断为枢轴门系统提供的无尽的设计可能性。同时为每种类型的枢轴门实现无与伦比的顺畅运行，形式和功能无缝连接。

D Series Pivot Hardware

Pivot installation

D系列枢轴五金


偏轴安装

Model 型号	893
Material 材质	Stainless Steel / Anodized Aluminum 不锈钢 / 阳极氧化铝
Dimensions 尺寸	208x93x32mm
Positioning 定位	Positioned at -90°, 0°, 90° -90°; 0°; 90°定位
Load Capacity 承重	100KG
Door Width 门宽	950mm
Function 功能	Two-way opening, 90-degree positioning, 0-degree hydraulic self-closing. Closing speed is adjustable in two stages 双向开启, 90度定位, 0度液压自闭。 闭门速度两段可调。

Model 型号	895
Material 材质	Stainless Steel / Anodized Aluminum 不锈钢 / 阳极氧化铝
Dimensions 尺寸	210x101x40mm
Positioning 定位	Positioned at -90°, 0°, 90° -90°; 0°; 90°定位
Load Capacity 承重	150KG
Door Width 门宽	1250mm
Function 功能	Two-way opening, 90-degree positioning, 0-degree hydraulic self-closing. Closing speed is adjustable in two stages 双向开启, 90度定位, 0度液压自闭。 闭门速度两段可调。




Pivot Installation
偏轴安装

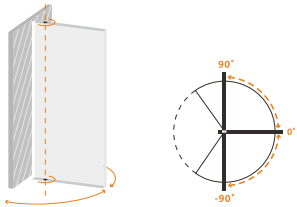


Optional Specifications

规格可选

893



895

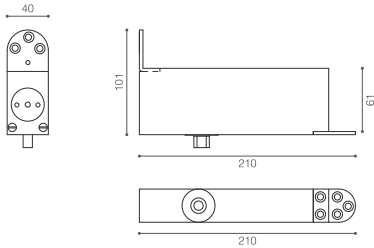


D Series Pivot Hardware

Pivot installation options available

D系列枢轴五金

偏轴安装可选

Model 型号	993
Material 材质	Stainless Steel/Anodized Aluminum 不锈钢/阳极氧化铝
Dimensions 尺寸	181.5x82x32mm
Positioning 定位	Positioned at -90°, 0°, 90° -90°, 0°, 90°定位
Maximum opening angle 最大开门角度	150°
Load Capacity 承重	100KG
Door Width 门宽	950mm
Function 功能	Two-way opening, 90-degree positioning, 0-degree hydraulic self-closing. Closing speed is adjustable in two stages 双向开启, 90度定位, 0度液压自闭。 闭门速度两段可调。

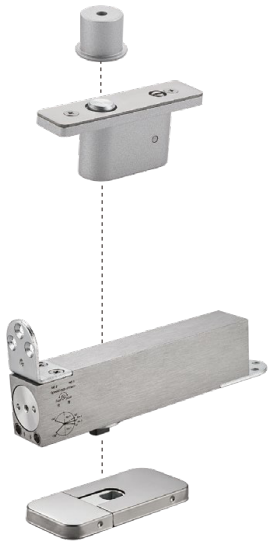

R Series Pivot Hardware

Central axis/Pivot installation options available

R系列枢轴五金



中轴/偏轴安装可选

Model 型号	993R
Material 材质	Stainless Steel/Anodized Aluminum 不锈钢/阳极氧化铝
Dimensions 尺寸	181.5x45x32mm
Positioning 定位	Can be positioned at 0°, 90°, 180°, and 270° 0°, 90°, 180°和 270°定位
Maximum opening angle 最大开门角度	360°
Load Capacity 承重	150KG
Door Width 门宽	1500mm
Function 功能	It can rotate 360 degrees, open in both directions, and can be positioned at 0, 90, 180, and 270 degrees. It can be hydraulically closed. The closing speed is adjustable. 可以360度旋转, 双向开启, 0度、90度、180度、 270度均可定位, 液压自闭, 闭门速度可调。





Optional

规格

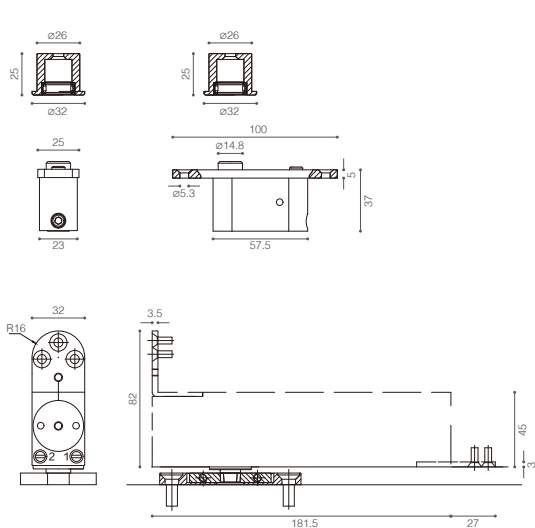

Optional

规格

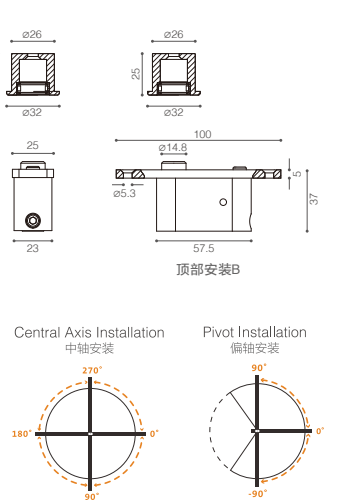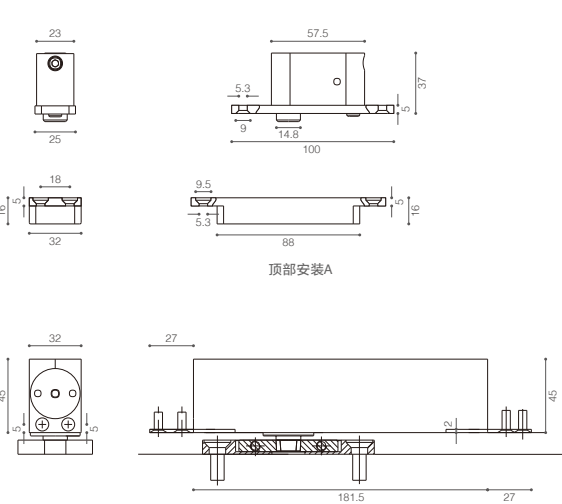

D Series PivotHardware

Central axis/Pivot installation options available

D系列枢轴五金


中轴/偏轴安装可选

Model 型号	973
Material 材质	Stainless Steel/Anodized Aluminum 不锈钢/阳极氧化铝
Dimensions 尺寸	257x25x28mm
Positioning 定位	Positioned at -90°, 0°, 90° -90°, 0°, 90° 定位
Maximum opening angle 最大开门角度	140°
Load Capacity 承重	100KG
Door Width 门宽	1200mm
Function 功能	Two-way opening, 90-degree positioning, 0-degree hydraulic self-closing. 双向开启, 90度定位, 0度液压自闭。



Optional

规格

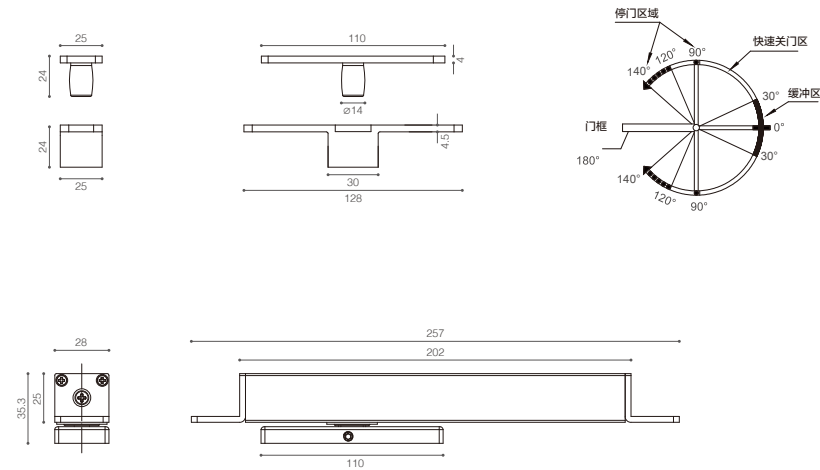


D Series Pivot Hardware

Central axis/Pivot installation options available

D系列枢轴五金


中轴/偏轴安装可选

Model 型号	963
Material 材质	Stainless Steel/Anodized Aluminum 不锈钢/阳极氧化铝
Dimensions 尺寸	214x43x32mm
Positioning 定位	Positioned at -90°, 0°, 90° -90°, 0°, 90° 定位
Maximum opening angle 最大开门角度	130°
Load Capacity 承重	100KG
Door Width 门宽	Central axis 1100mm Pivot axis 1800mm 偏轴最大1100mm 中轴最大1800mm
Function 功能	Two-way opening, 90-degree positioning, 0-degree hydraulic self-closing. 双向开启, 90度定位, 0度液压自闭。

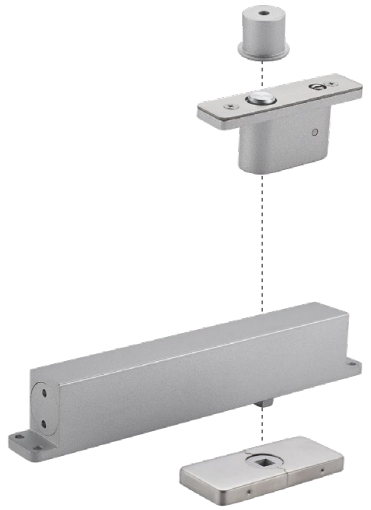

Optional

规格

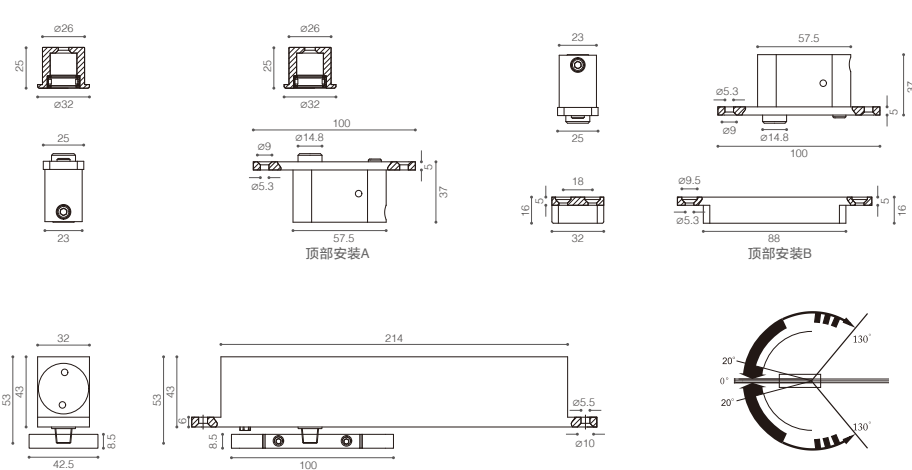

Controllable Operating Trajectory

可控的运行轨迹



CANOVO provides you with absolute control over the movement of pivot doors. The closing speed is adjustable in two stages, and the installation base is adjustable as well, perfectly addressing the adjustment issues caused by minor dimensional deviations on-site, allowing the door leaf to operate at the speed you set.

CANOVO为你提供对枢轴门移动的绝对控制，闭门速度两段可调，安装底座可调，完美解决现场细微尺寸偏差带来的调节困扰，让门扇按你设定的速度运行。




D Series Glass Pivot Door Hardware

Pivot installation

D系列玻璃枢轴门五金 偏轴安装

Model 型号	883
Material 材质	Stainless Steel / Aluminum Alloy Body 不锈钢 / 铝合金机体
Maximum Door Weight 最大门重	100KG
Maximum Door Width 最大门宽	950mm
Dimensions 尺寸	186x68x36mm
Positioning 定位	0° and bidirectional 90° positioning 0°, 双向90°定位
Function 功能	Bidirectional opening, 90° positioning, hydraulic self-closing 双向开启、90°定位、液压自闭
Door Leaf Thickness 门扇厚度	10~15mm
Speed adjustment 速度调整	Two-stage adjustable closing speed 两段闭门速度可调
Installation Location 安装位置	Pivot 偏轴

Model 型号	885
Material 材质	Stainless Steel / Aluminum Alloy Body 不锈钢 / 铝合金机体
Maximum Door Weight 最大门重	150KG
Maximum Door Width 最大门宽	1250mm
Dimensions 尺寸	197x77x42mm
Positioning 定位	0° and bidirectional 90° positioning 0°, 双向90°定位
Function 功能	Bidirectional opening, 90° positioning, hydraulic self-closing 双向开启、90°定位、液压自闭
Door Leaf Thickness 门扇厚度	10~15mm
Speed adjustment 速度调整	Two-stage adjustable closing speed 两段闭门速度可调
Installation Location 安装位置	Pivot 偏轴

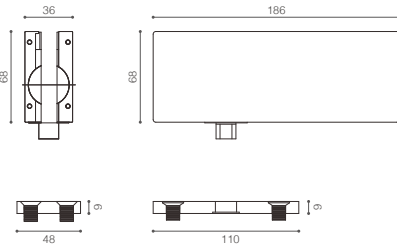



Frameless Pivot Glass Door

无框枢轴玻璃门

Frameless minimalism is the ultimate expression of modern style. CANOVO's 880 Series products offer pivot door solutions for frameless glass partitions.

These can be installed with either a central or offset axis, supporting speed adjustments. With a maximum door width of 2500 mm, they are suitable for 10-15 mm glass, fulfilling all designers' visions of frameless minimalism.

无框极简是现代风格的极致体现，CANOVO的880系列产品，为无框玻璃隔断，提供门扇开启的枢轴门解决方案。

可以中轴也可以偏轴安装，支持速度调整，最大门宽2500mm，适合10-15mm玻璃，成就设计师关于无框极简的所有构想。

R Series Glass Pivot Door Hardware

Central axis / Pivot installation options available

R系列玻璃枢轴门五金 中轴 / 偏轴安装可选	
Model 型号	883R
Material 材质	Stainless Steel / Aluminum Alloy Body 不锈钢 / 铝合金机体
Maximum Door Weight 最大门重	100KG
Maximum Door Width 最大门宽	950mm
Dimensions 尺寸	197x80.5x42mm
Positioning 定位	Can be positioned at 0°, 90°, 180°, and 270° 0°, 90°, 180°, 270°均可定位 Can rotate 360 degrees and features a hydraulic self-closing function. The door can be positioned and closed at 0°, 90°, 180°, and 270° 可以360度旋转，具有液压自闭功能0°，90°，180°，270°均可定位
Function 功能	
Door Leaf Thickness 门扇厚度	10-15mm
Speed adjustment 速度调整	Two-stage adjustable closing speed 两段闭门速度可调
Installation Location 安装位置	Central axis or Pivot 中轴或偏轴

Model 型号	885R
Material 材质	Stainless Steel / Aluminum Alloy Body 不锈钢 / 铝合金机体
Maximum Door Weight 最大门重	200KG
Maximum Door Width 最大门宽	1250mm
Dimensions 尺寸	197x80.5x42mm
Positioning 定位	Can be positioned at 0°, 90°, 180°, and 270° 0°, 90°, 180°, 270°均可定位 Can rotate 360 degrees and features a hydraulic self-closing function. The door can be positioned and closed at 0°, 90°, 180°, and 270° 可以360度旋转，具有液压自闭功能0°，90°，180°，270°均可定位
Function 功能	
Door Leaf Thickness 门扇厚度	10-15mm
Speed adjustment 速度调整	Two-stage adjustable closing speed 两段闭门速度可调
Installation Location 安装位置	Central axis or Pivot 中轴或偏轴

