

Manual Sliding Door Hardware System

手动移门五金系统



Manual sliding doors remain the most popular and widely used sliding door system. Whether it's a single sliding door, pocket sliding door, or multi-panel sliding door, CANOVO has the perfect solution.

手动移门依然是最受欢迎且应用广泛的移门系统，无论是单移门、口袋移门、联动移门，CANOVO凯诺威都有完美的解决方案。

Manual Single Sliding Door System

手动单移门系统

Movement Type:

- Single door sliding
- Double door bi-fold sliding
- Double door offset sliding

Track Installation:

The track can be directly mounted on the top or concealed within the ceiling track groove.

Door Weight Capacity:

The weight of the single door leaf is 80 KG.

Damping Technology:

Supports bidirectional damping.

Accessory Options:

Suitable for both wooden doors and aluminum frame glass doors.

移动形式:


- 单门移动
- 双门对开移动
- 双门错位移动

轨道安装: 轨道可以直接安装在顶部, 也可以收藏在天花轨道槽内

门扇承重: 单门扇重量在80KG

阻尼技术: 支持双向阻尼

配件选择: 木门和铝框玻璃门均可适用

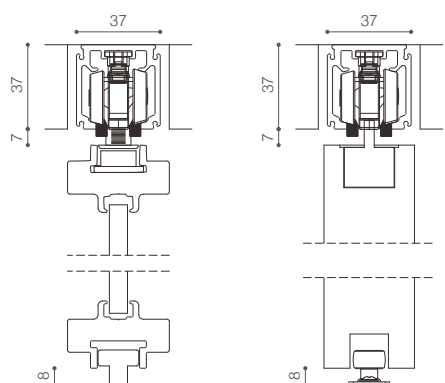

单系统



Manual Linkage Sliding Door System

手动联动移门系统



Movement Type: Synchronous same-direction movement.

Track Installation:

The track can be directly mounted on the top or concealed within the ceiling track groove.

Door Weight Capacity:

Maximum load capacity for a single door is 80 KG.

Technical Specifications:


Belt-driven linked door structure.

移动形式：同步同向联动移动


轨道安装：轨道收藏在天花轨道槽内

门扇承重：单门最大承重80KG

技术说明：皮带传动的联动门结构

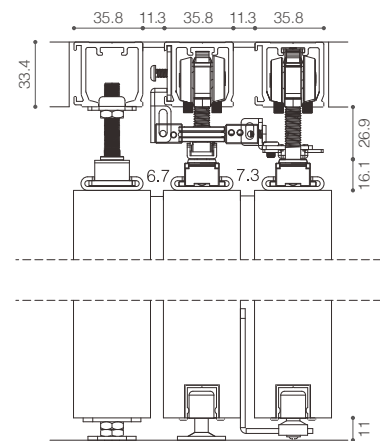

单系统

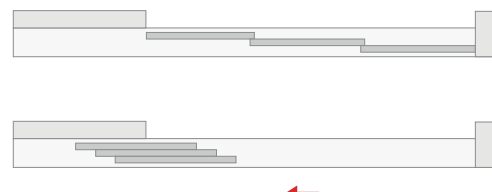

Manual Pockets Sliding Door System

手动口袋移门系统

Movement Type: Pocket sliding door

Track Installation:

The track is concealed within the ceiling track groove and needs to be detachable, eliminating the need for a maintenance access opening in the wall.

Door Weight Capacity:

Maximum load capacity for a single door is 80 KG.

Damping Technology:

Supports bidirectional damping (if a rebounder is installed, it will be unidirectional damping).

Patented Technology:

Optional pocket touch rebound function.



移动形式：口袋移门

轨道安装：轨道收藏在天花轨道槽内，轨道需要可以拆卸，不需要在墙面留检修口

门扇承重：单门最大承重80KG

阻尼技术：支持双向阻尼（如选安装反弹器，则为单向阻尼）

专利技术：可选口袋向触碰反弹功能


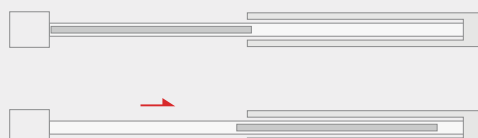
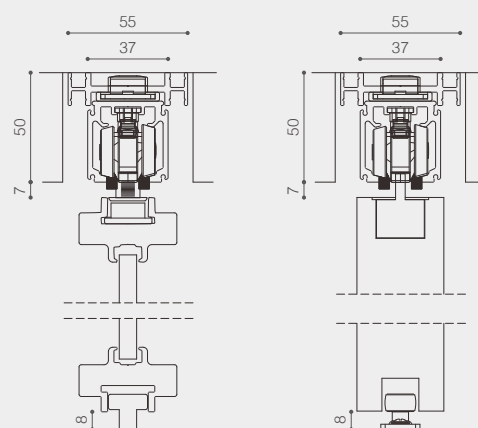






V9002

口袋移门拉手

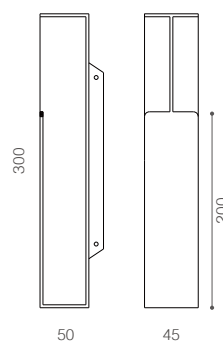

Material: Stainless Steel
Door Thickness: 40-45mm

材质: 不锈钢
对应门厚: 40-45mm



CANOVO®



Inside the door (Lock/Unlock)
门内侧（锁定 / 解锁）

Locking Solutions For Concealed Sliding Doors


隐形移门的锁定解决方案

Ghost doors and wall-mounted sliding doors have door leaves that are not aligned with the wall surface, making traditional sliding door locks inadequate for locking functionality. The ghost door sliding lock launched by CANOVO effectively addresses this issue, featuring only an emergency access hole on the exterior and a push-to-lock mechanism on the interior. Additionally, the wall is equipped with a collision pad to effectively protect the wall's integrity.

幽灵门、挂墙移门，门扇和墙面不在一个平面，传统的推拉门锁无法解决锁定功能，CANOVO推出的幽灵门移门锁，很好的解决了这个问题，门外只有应急开启孔，门内按压反锁，墙面配置防撞垫，有效保护墙面完好。



Unlock
解锁

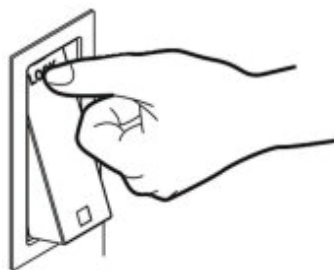

Lock
锁定

OS.EX




SC I 丝绒银



SG I 雾影灰




MB I 极夜墨

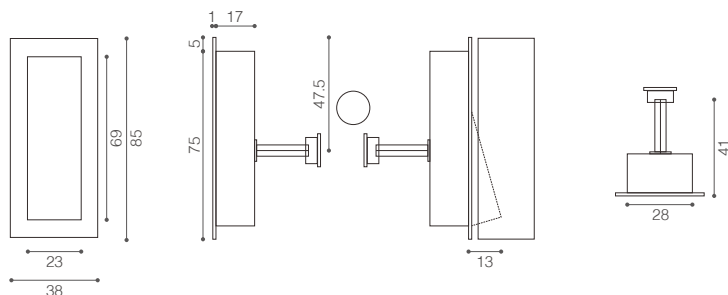

Material: Brass
Door Thickness: 38-55mm

材质: 黄铜
对应门厚: 38-55mm

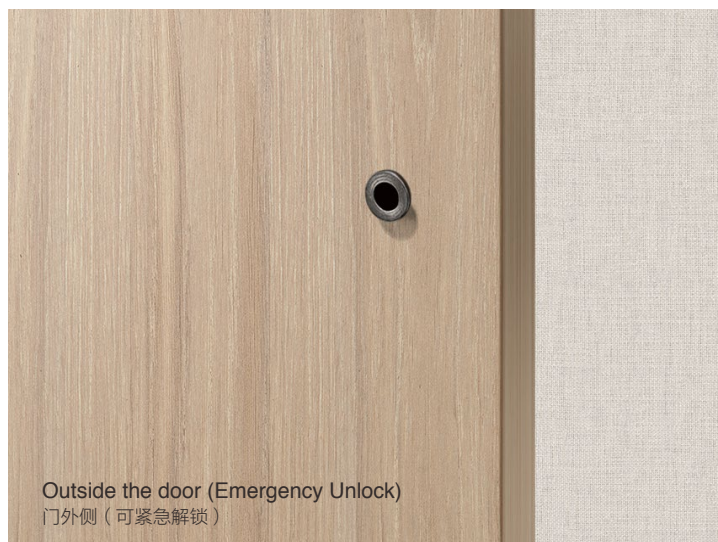

Outside the door (Emergency Unlock)
门外侧 (可紧急解锁)

114





旋转反锁，轻松锁定

114



对应门厚: 38-55mm

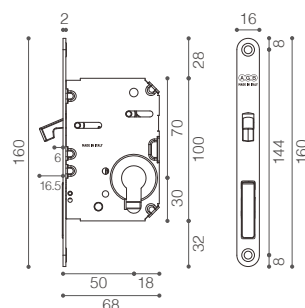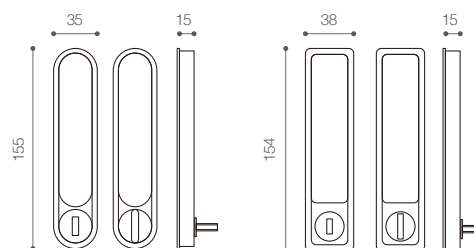

WAVE移门锁芯锁体



Side Pull-out
侧拉移出



Sliding Door Solutions



推拉门的解决方案

The Italian AGB Scivola Tre Class product, combined with CANOVO sliding door lock panels, provides a perfect sliding door locking solution.

意大利AGB的Scivola Tre Class产品与CANOVO移门锁面板结合，达成完美的推拉门锁解决方案

Material: Zinc Alloy
Door Thickness: 38-55mm

材质：锌合金
对应门厚：38-55mm

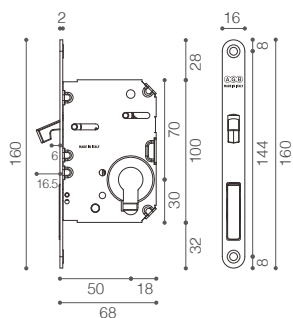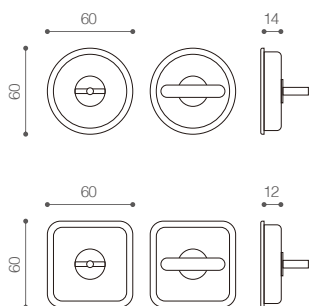

WAVE
sliding door lock cylinder & mortise lock
WAVE移门锁芯锁体

YM6012 (椭圆)



SG | 雾影灰

YM6012 (方形)



SG | 雾影灰